





产品图纸

国内最专业的磁铁连接器制造商-泰科汉泽只造精品

序号	DESCRIPTION	REV	DESIGN	DATE
①				
②				


NOTES:

- 1.0 PLATING:
 - 1) Contact plating: brass Au10u" over 50-80u" Ni
 - 2) Contact solder area plating: brassAu5u" over 50-80u" Ni
 - 3) Spring: SUS
 - 4) Housing: LCP 265*MAX
 - 4) Cover: LCP 265*MAX
- 2.0 Rated voltage(Per Contact): 12 Volts
- 3.0 Rated Current(Per Contact): 3A maximum
- 4.0 Insulation Resistance: 100MEGAOHMS Minimum
- 5.0 Dielectric Withstanding Voltage: 100V/RMS AT 60HZ
- 6.0 Contact Resistance: 30mΩ maximum before test and 60mΩ maximum after test at pogo pin working stroke
- 7.0 Recommended Working Stroke&Force:
 - 1) Stroke 1.0mm(Per Contact):50gfmax
 - 2) Mechanical life:
 - 3) 0.80mm(Mechanical life):30,000 Cycles Min
- 8.0 Working Temperature Range: -30~85°

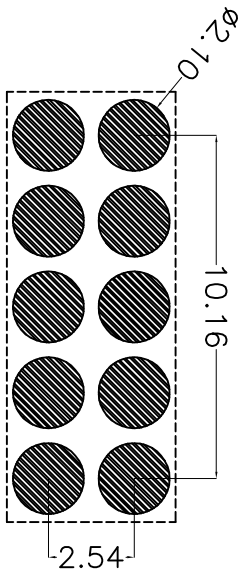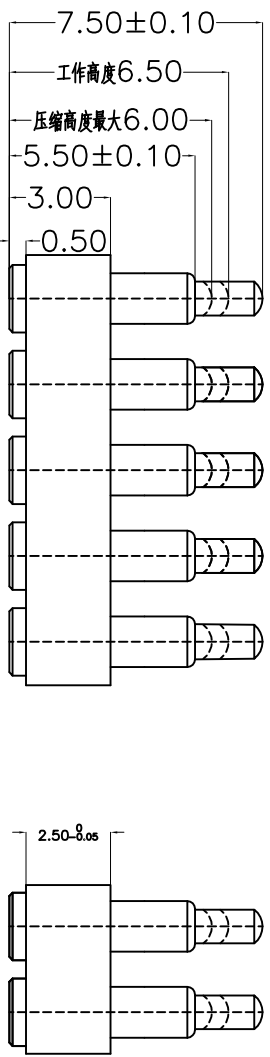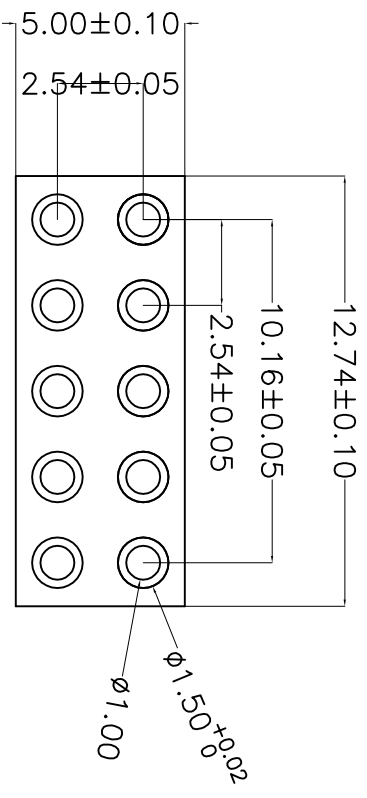

PCB LAYOUT

Layout Tolerance: ? .05mm

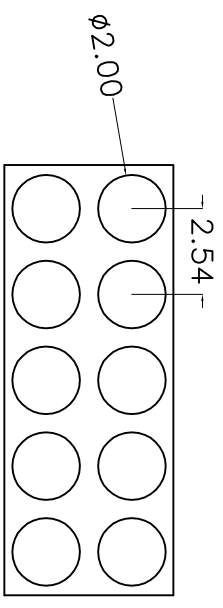



深圳市泰科汉泽精密电子有限公司

Tyco Hancorn Precision Electronics

产品名称	10PIN 磁铁连接器	产品规格	2.0*7.5 2.54PH	版本	A0
产品编号	HY91-00154-001	使用材料		比例	1:1
表面编号		表面处理	(见附表)	单位	mm
未注尺寸公差:	±0.10	绘图/日期	邹巧云	2014-11-25	
未注角度公差:	±1°	审核/日期			